
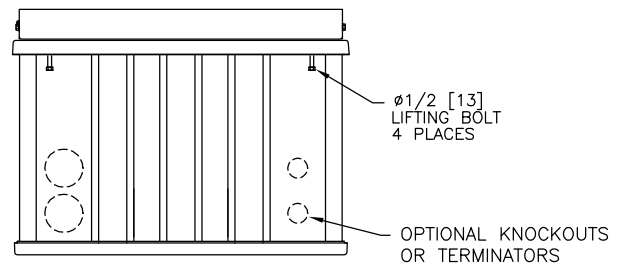
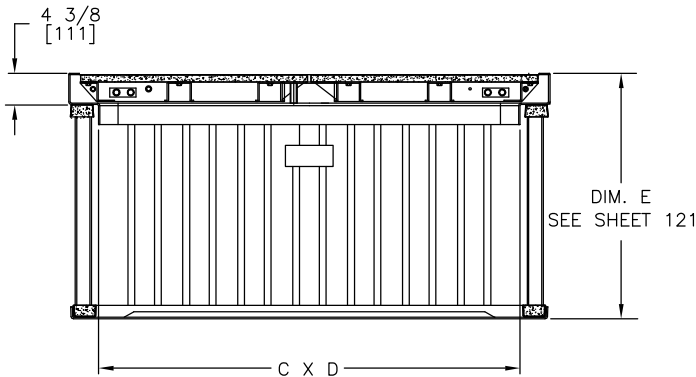
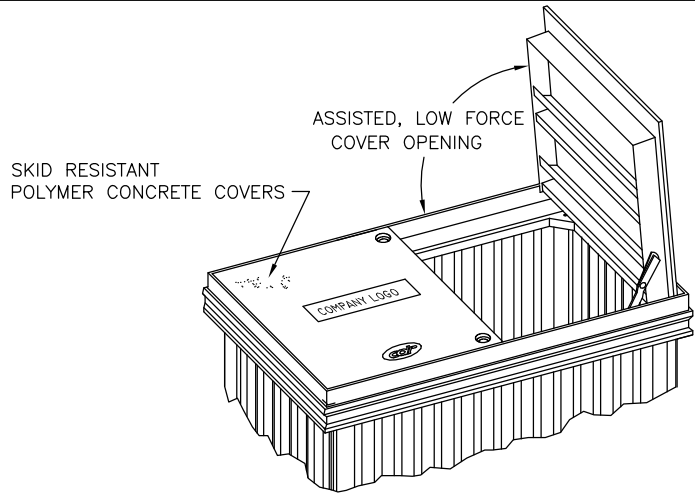


SPECIFICATIONS/DATA

TORSION ASSIST BOX ASSEMBLIES

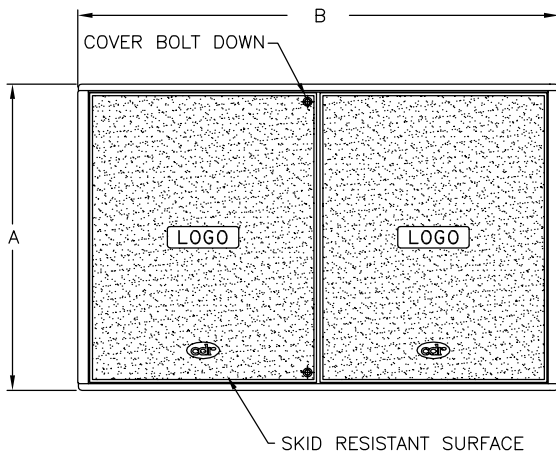

All standard box options such as mouseholes and pulling eyes are available

Dimensions in brackets are in millimeters

ASSEMBLIES					
BOX			TORSION ASSIST		
SIZE	A	B	SIZE	C	D
3048	35 5/8 [645]	58 3/4 [1492]	3048	24 1/2 [622]	42 1/4 [1073]
3660	41 1/4 [1048]	67 1/2 [1715]	3660	35 [889]	59 [1499]
4848	54 1/2 [1384]	58 1/2 [1486]	4848	47 [1194]	47 [1194]
4860	52 7/8 [1343]	67 1/2 [1715]	4860	47 [1194]	59 [1499]
4872	54 5/8 [1387]	81 5/8 [2073]	4872	46 5/8 [1184]	70 1/8 [1781]
4896	56 [1422]	101 1/2 [2578]			
7272	78 [1981]	78 [1981]			

SPECIFICATIONS/DATA

TORSION ASSIST BOX ASSEMBLIES

- For At-Grade Installations
- Torsion Assisted Cover provides easy access
- All Steel Frame with Skid Resistant Polymer Concrete Cover
- Covers also open to 180° when needed
- Cover Latch – Holds Covers upright during Cable Installation

TORSION ASSIST ASSEMBLIES					
DESCRIPTION	Part No.	Old Catalog No.	DIM. E IN./mm.	WEIGHT# LBS./kg.	DESIGN/TEST LOAD#
3048	A1A3048500	A10-3048-18TA	18/457	480/217	8,000/12,000
	A1A3048501	A10-3048-24TA	24/610	490/222	8,000/12,000
	A1A3048502	A10-3048-30TA	30/762	500/227	8,000/12,000
	A1A3048503	A10-3048-36TA	36/914	510/231	8,000/12,000
	A1A3048504	A10-3048-48TA	48/1219	520/236	8,000/12,000
3660	A1A3660505	A10-3660-18TA	18/457	720/326	8,000/12,000
	A1A3660506	A10-3660-24TA	24/610	735/333	8,000/12,000
	A1A3660507	A10-3660-30TA	30/762	750/340	8,000/12,000
	A1A3660508	A10-3660-36TA	36/914	765/346	8,000/12,000
	A1A3660509	A10-3660-48TA	48/1219	780/354	8,000/12,000
4848	A1A4848501	A10-4848-18TA	18/457	809/367	8,000/12,000
	A1A4848502	A10-4848-24TA	24/610	822/373	8,000/12,000
	A1A4848503	A10-4848-30TA	30/762	835/379	8,000/12,000
	A1A4848504	A10-4848-36TA	36/914	848/385	8,000/12,000
	A1A4848505	A10-4848-48TA	48/1219	874/396	8,000/12,000
4860	A1A4860500	A10-4860-18TA	18/457	875/397	8,000/12,000
	A1A4860501	A10-4860-24TA	24/610	885/401	8,000/12,000
	A1A4860502	A10-4860-30TA	30/762	900/408	8,000/12,000
	A1A4860503	A10-4860-36TA	36/914	915/415	8,000/12,000
	A1A4860504	A10-4860-48TA	48/1219	935/424	8,000/12,000
4872	A1A4872500	A10-4872-18TA	18/457	1050/476	8,000/12,000
	A1A4872501	A10-4872-24TA	24/610	1062/482	8,000/12,000
	A1A4872502	A10-4872-30TA	30/762	1080/490	8,000/12,000
	A1A4872503	A10-4872-36TA	36/914	1098/498	8,000/12,000
	A1A4872504	A10-4872-48TA	48/1219	1122/509	8,000/12,000
4896	A1A4896503	A10-4896-18TA	18/457	1310/594	8,000/12,000
	A1A4896504	A10-4896-24TA	24/610	1325/600	8,000/12,000
	A1A4896505	A10-4896-30TA	30/762	1346/610	8,000/12,000
	A1A4896506	A10-4896-36TA	36/914	1368/620	8,000/12,000
	A1A4896507	A10-4896-48TA	48/1219	1390/630	8,000/12,000
7272	A1A7272500	A10-7272-18TA	18/457	1686/765	8,000/12,000
	A1A7272501	A10-7272-24TA	24/610	1704/773	8,000/12,000
	A1A7272502	A10-7272-30TA	30/762	1723/781	8,000/12,000
	A1A7272503	A10-7272-36TA	36/914	1742/790	8,000/12,000
	A1A7272504	A10-7272-48TA	48/1219	1779/807	8,000/12,000

- Loadings comply with ANSI/SCTE 77 (See page 3 & 4)